








TOWER UPS WITH AUTOMATIC VOLTAGE REGULATION



The compact UPS with automatic voltage regulation to provide power protection


Designed for home and office applications, the UT Series adopts line-interactive topology with Automatic Voltage Regulation (AVR) function to offer stabilized AC power output. The products are compatible with generators to extend power continuity. Other features include overload protection and configurable alarm to safeguard your devices.

SERIES FEATURES

- Line-interactive UPS Topology
- Automatic Voltage Regulation (AVR)
- Generator Compatible
- Overload Protection
- Surge and Spike Protection
- EMI and RFI Filtration
- LED Status Indicator
- Configurable Alarm

PRODUCT CALLOUTS

1. Power On Indicator
2. Power On/Off Switch
3. AC Input Power Cord
4. Battery Backup & Surge Protected Outlets

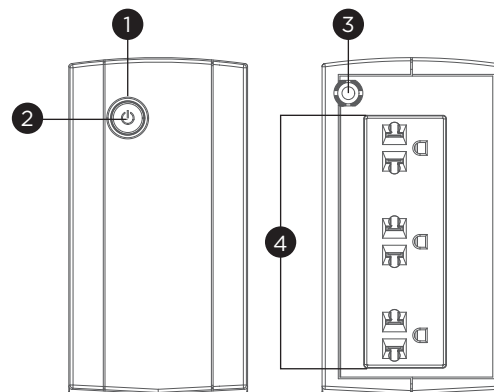

UT600E



TECHNICAL SPECIFICATIONS

Model Name	UT600E
General	
UPS Topology	Line-interactive
Input	
Generator Compatibility	Yes
Nominal Input Voltage (Vac)	220 ± 10%
Input Voltage Range (Vac)	165 - 290
Input Frequency (Hz)	50 ± 5, 60 ± 5
Input Frequency Detection	Auto-sensing
Rated Input Current (A)	2.72
Input Connector Type	NEMA 5-15P
Output	
Capacity (VA)	600
Capacity (Watts)	360
On Battery Waveform	Simulated Sine Wave
On Battery Output Voltage (Vac)	220 ± 10%
On Battery Frequency (Hz)	50 ± 1%, 60 ± 1%
Automatic Voltage Regulation (AVR)	Single Boost, Single Buck
Overload Protection	Fuse
Outlet(s) - Total	3
Outlet Type	AS x 3
Outlet(s) - Battery & Surge Protected	3
Typical Transfer Time (ms)	4
Battery	
Runtime at 150W (min)	6
Typical Recharge Time (Hours)	8
User-replaceable	No
Battery Type	Sealed Lead-acid
Surge Protection & Filtering	
Surge Suppression (Joules)	150
EMI/RFI Filtration	Yes
Management & Communications	
LED Indicators	Power On, Line Mode, Battery Mode, Low Battery
Audible Alarms	Battery Mode, Low Battery, Overload, UPS Fault
Physical	
Form Factor	Tower
Physical Size - UPS Module	
Dimensions (WxHxD) (mm.)	84 x 159 x 252
Weight (kg.)	3.6
Environmental	
Operating Temperature (°C)	0 - 40
Operating Relative Humidity (Non-condensing) (%)	0 - 90
Online Thermal Dissipation (BTU/hr)	40
Certifications	
RoHS	Yes
Warranty	
Product Warranty Period (Year)	3

#All specifications are subject to change without notice.

