

### ⚡ Specifications

#### Nominal Voltage(V)

2V

#### Nominal Capacity

10	hour rate	(50A	to	1.80V)	500Ah
5	hour rate	(85A	to	1.80V)	425Ah
3	hour rate	(125A	to	1.80V)	375Ah
1	hour rate	(300A	to	1.80V)	300Ah

#### Weight

≥29kg(63.8Lbs.)

#### Internal Resistance (at 1KHz)

≤0.45 mΩ

#### Maximum Discharge Current for

5 seconds: 3000A

#### Charging Methods at 25°C(77°F)

Cycle use:	
Charging Voltage	2.33 to 2.45V
Coefficient	-5.0mV/°C/cell
Maximum Charging Current :	150A
Standby use:	
Float Charging Voltage	2.20 to 2.30V
Coefficient	-3.0mV/°C/cell

#### Operating Temperature Range

Charge	-10°C(14°F)	to	60°C(140°F)
Discharge	-10°C(14°F)	to	60°C(140°F)
Storage	-10°C(14°F)	to	60°C(140°F)

#### Charge Retention (shelf life) at 20°C(68°F)

1 month	98%
3 month	94%
6 month	85%

#### Case Material

ABS UL94 HB  
Option: Flammability resistance of (UL94 V-0)

#### Design Life

20 Years.

#### Terminal

F18

#### Battery Construction

Positive plate	Negative Plate	Electrolyte	Terminal	Safety value	Separator	Efficient gas recombination
Lead dioxide	Lead	Gelled acid	Copper	Rubber	PE	99%




### ⚡ Dimensions

Length (L)	241±3 (9.49±0.12)
Width (W)	172±3 (6.77±0.12)
Height (H)	326±3 (12.83±0.12)
Overall Height (HT)	340.5±3 (13.41±0.12)


#### Description of torque value of hard ware for the terminals:





Recommended torque value	M8:12 N-m (122kgf-cm)
Maximum allowable torque value	M8:20 N-m (204kgf-cm)

mm(inch)

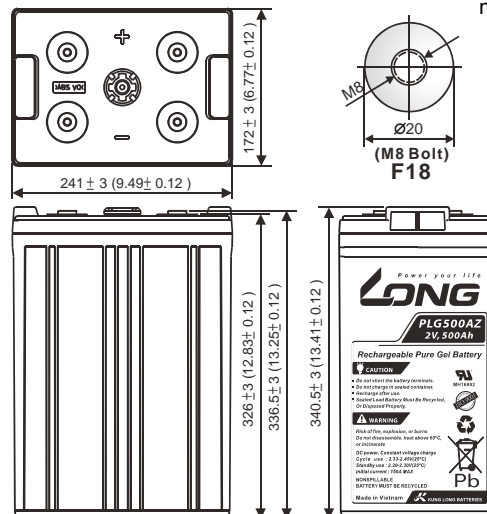

(V) FOR 2V BATTERY Discharge Time VS. Discharge Current (25°C)

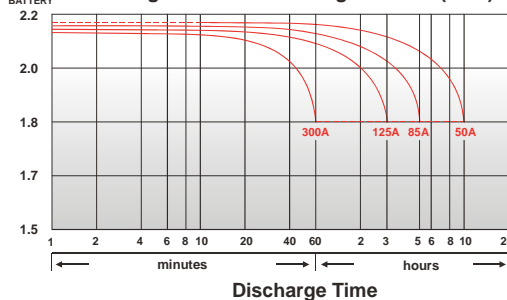

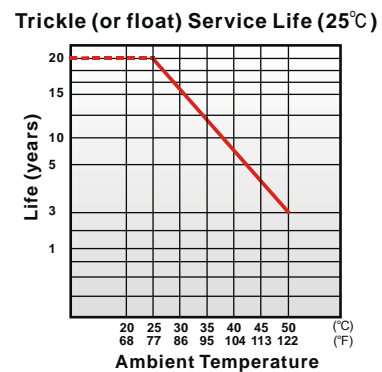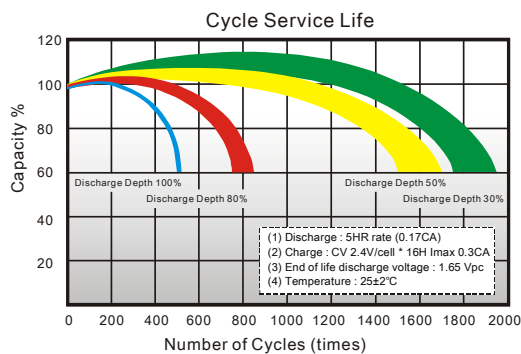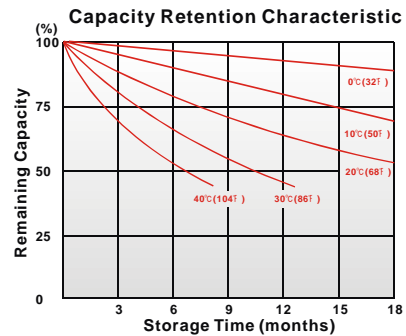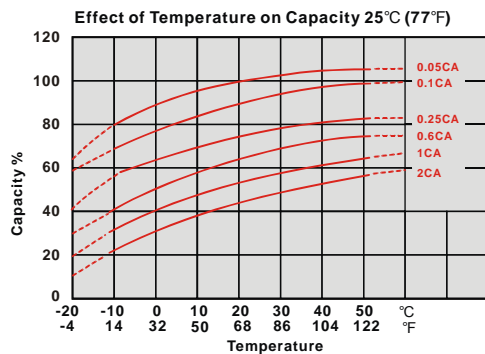

### - PERFORMANCE DATA

#### Discharge Rates in Watts to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.65V	1.60V
Time							
15	min	1280	1440	1536	1648	1744	1840
20	min	850	931	1018	1078	1140	1203
30	min	719	789	865	910	955	993
60	min	492	525	569	581	598	608
120	min	308	324	340	342	347	351
180	min	232	242	254	261	271	277
240	min	170	179	188	197	201	205
300	min	149	158	164	169	173	176
480	min	107	112	117	119	121	123
600	min	90.0	92.2	94.1	96.9	97.9	98.8
1200	min	49.0	50.5	51.7	52.3	52.7	53.1

#### - Discharge Rates in Amperes to Various End Voltages at 25°C(77°F)

End Voltage		1.85V	1.80V	1.75V	1.70V	1.65V	1.60V
Time							
15	min	800	900	960	1030	1090	1150
20	min	491	546	597	637	658	679
30	min	398	447	498	542	582	612
60	min	263	300	314	330	346	358
120	min	162	183	200	207	215	221
180	min	119	127	135	141	146	152
240	min	101	107	112	115	118	121
300	min	78.0	85.0	90.0	91.1	92.1	92.6
480	min	56.0	57.9	59.6	60.2	60.8	61.2
600	min	47.8	50.0	50.1	50.2	50.3	50.5
1200	min	24.7	25.5	25.9	26.2	26.5	26.8

170424-1A-V