

Specifications

Nominal Voltage(V)

6V

Nominal Capacity

20 hour rate	(11.25A	to	5.25V)	225Ah
10 hour rate	(22.5A	to	5.25V)	225Ah
5 hour rate	(38.25A	to	5.10V)	191.3Ah
3 hour rate	(51.75A	to	5.10V)	155.3Ah

Weight

Approx. 30.5kg(67.3Lbs.)

Internal Resistance at 25°C(77°F)

Approx. 3mΩ

Reserve Capacity

25A	475min
75A	132min

3-Stage Charging Methods at 25°C(77°F)

Fast Charge: Max. Charging Current:	67.5A
Topping Charge:	7.20~7.35V
Float Charge:	6.75~6.90V
Coefficient	-5.0V/°C/cell

Operating Temperature Range

Charge	-15°C(5°F)	to	40°C(104°F)
Discharge	-15°C(5°F)	to	50°C(122°F)
Storage	-15°C(5°F)	to	40°C(104°F)

Charge Retention (shelf life) at 20°C(68°F)

1 month	98%
3 month	94%
6 month	85%

Case Material

ABS UL94 HB

Option: Flammability resistance of (UL94 V-0)

Terminal

F18








Dimensions

Length (L)	260±2(10.24±0.08)
Width (W)	180±2(7.09±0.08)
Height (H)	265±2(10.43±0.08)
Overall Height (HT)	272±2(10.71±0.08)

Description of torque value of hardware for the terminals:

Recommended torque value	M8: 12 N-m (122 kgf-cm)
Maximum allowable torque value	M8: 20 N-m (204 kgf-cm)

mm(inch)

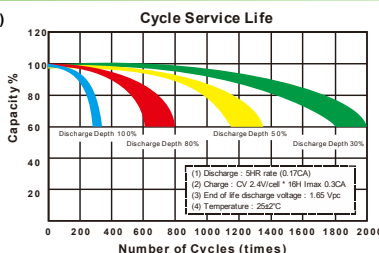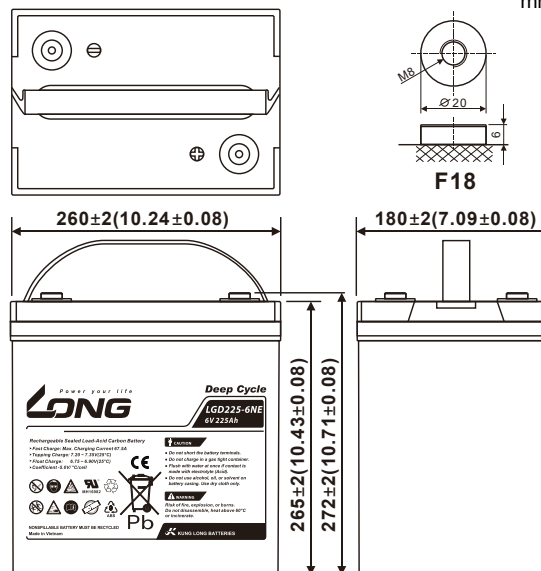

210525-1A